

ELED-20P-C250/700T

20W Triac (leading&Trailing) Dimming Dip-Switch Output Current LED Driver



Features:

- Constant Current mode output with multiple levels selectable by dip switch
- Dimming function: Triac/phase cut dimming
- Work with leading or trailing edge Triac dimmer
- (ON key: leading edge; 1 key: trailing edge)
- AC input: 200-240VAC
- Built-in active PFC function
- Efficiency up to 78%
- IP20 design for indoor installation
- Full protection plastic housing easy installation
- Protections: Short circuit/ Over load
- Cooling by free air convection
- Suitable for LED lighting and moving sign applications
- Strong compatibility, flicker-free dimming



Models								
				ELED-20P	-C250/7001	1	ON	OFF
Output Specifications								
Rated Current	700mA	600mA	550mA	500mA	450mA	400mA	350mA	250mA
Current Tolerance	± 25mA							
Output Voltage	3-29V	3-33V	3-36V	3-40V	3-42V	3-42V	3-42V	3-42V
Rated power	20.3W	19.8W	19.8W	20W	18.9W	16.8W	14.7W	10.5W
Input Specifications								
Voltage Range	200-240VAC							
Frequency Range	47-63Hz							
Inrush Current	2.96A (Twidth=7.6μs 230VAC)							
Power Factor (Typ.)	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Full Load Efficiency (Typ.)	78%	78%	78%	78%	78%	78%	78%	78%
AC Current (Typ.)	0.15A							
Leakage Current	<0.50mA/220VAC							
Protection								
Short Circuit	Constant Current mode, recovers automatically after fault condition is removed							
Over Load	≤120%							
Over Current	≤1.4*I out							
Protection Class	II							
Environment								
Working Temperature	-40~+60°C (Refer to derating curve)							
Working Humidity		20-90% RH, non-condensing						
Storage Temperature, Humidity		-40~+80°C, 10-95% RH						






ELED-20P-C250/700T

20W Triac (leading&Trailing) Dimming Dip-Switch Output Current LED Driver

Environment				
Temperature Coefficient	±0.03%/°C (0-50°C)			
Vibration	10-500Hz, 2G 12min./ 1 cycle, period for 60min.each along X, Y, Z axes			
Safety & EMC				
Safety standards	EN61347-1, EN61347-2-13, UL8750			
Withstand voltage	I/P-O/P:3.75KVAC			
Isolation resistance	I/P-O/P:100MΩ/500VDC/25°C/70%RH			
EMC Emission	Compliance to EN55015, EN61000-3-2,3 (≥50% load), FCC Part 15B			
EMC Immunity	Compliance to EN61000-4-2,3,4,5,6,11, EN61547, A light industry level (surge 4KV)			
Other Specifications				
Weight	0.10 kg			
Size	159 x 43x 20 mm			
Packing	320 x 280 x 215 mm (50PCS/CTN)			

Mechanical Specifications

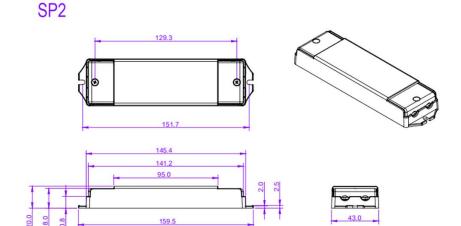

- X Input with DG126 terminals 3P: Live Wire AC (L), Neutral Wire AC(N) € 1.00 (N)
- **Output LED SEC with DG126 terminals 2P: output Positive (LED+), output negative (LED-). Connected to LED Lamps.
- **Suggested wire diameter: Input 0.75-2mm²; Output:0.5-2mm².
- **Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.
- *Note: Any other requests we can customized.

Dimming Operation:

 $\label{thm:constant} \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{tabular}{ll} \verb&MC phase line (L) by connection a Triac dimmer. \\ \begin{$

 $\mbox{\ensuremath{\,\mathbb{X}}}\mbox{\ensuremath{\,\text{Usually}}}$ matching with leading edge and trailing edge dimmer both.

At input area of ELED-20 series:

**please try to use the small power dimmer, have access to a wider dimming range,

high-power dimmer is difficult to achieve the output current to zero

% please try to use dimmers with power at least 2 times as the output power of the driver.






ELED-20P-C250/700T

20W Triac (leading&Trailing) Dimming Dip-Switch Output Current LED Driver


Derating Curve

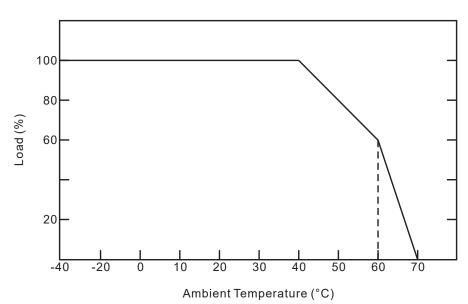

*To extend their life, please refer to the Derating Curve and derate according to the temperature.

Dimming Operation

■ Connecting Diagram in Single (I)

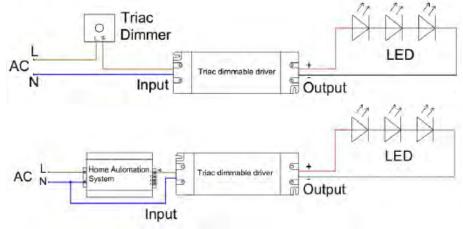

■ Connecting Diagram Multiple (II)

