


Euro Spot

Cat. No. ES



The Euro Spot is an extra compact luminaire designed for situations where the fixture needs to be very unobtrusive or concealed. The fixture is inserted into the ground and can be easily aimed by angling the luminaire in the desired direction. This luminaire uses a MR11 lamp to achieve the compact dimensions and also has a built in glare guard. The fixture can be mounted in a variety of outdoor situations and can also be supplied with an integral spike for easy in-ground mounting.

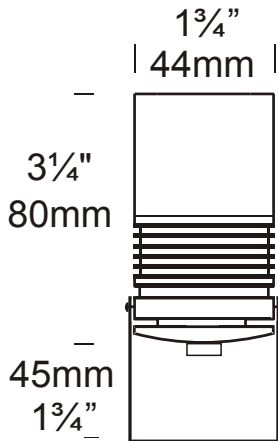

Ordering Information

Luminaire Type

Material

Accessories

ES - Euro Spot

COP - Copper

SS - Stainless Steel

CJK150 - Cable Joint Kit
LENSEURF - Frosted Lens

Ordering Example: ES COP - Euro Spot in Copper
LENSEURF - Frosted Lens
(accessories ordered separately)

Luminaire Construction

CNC machined from one of the following metals:

Copper

Body: 45.4mm (1¾") x 80mm (3") copper rod.

"U" Bracket: 12mm (½") x 3mm (1/8") copper flat bar.

316 Stainless Steel

Body: 45.4mm (1¾") x 80mm (3") stainless steel rod.

"U" Bracket: 12mm (½") x 3mm (1/8") stainless steel flat bar.

Mounting

Via "U" bracket that is screwed to the mounting surface

Features

Lens

6mm (¼") clear flush fit shatter resistant glass with Hex Cell Louvre for glare control.

Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lamp Holder


MR11 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat. CJK 150). Not approved for USA/Canada.

Frosted Lens (Cat. LENSEURF).

Standards

IP66, UL1838, 

Luminaire Weight

Copper - 0.550kg (1lb 3oz)

Stainless Steel - 0.500kg (1lb 2oz)

Power Supply

Hunza Inground or Wall Mount Transformer: not included.

USA and Canada



Hunza Wall Mount Transformer: not included.

Lamp Options

MR11 - 20 watt lamp max.

USA and Canada

MR11 - 10 watt lamp max.

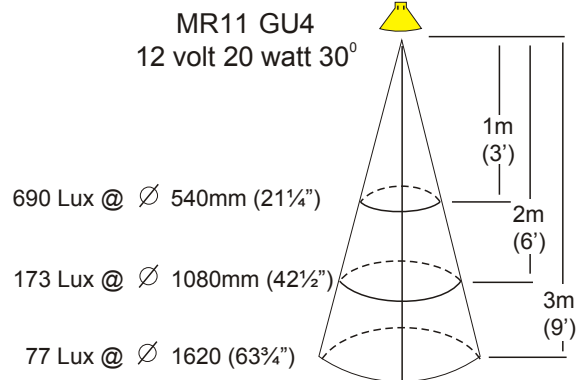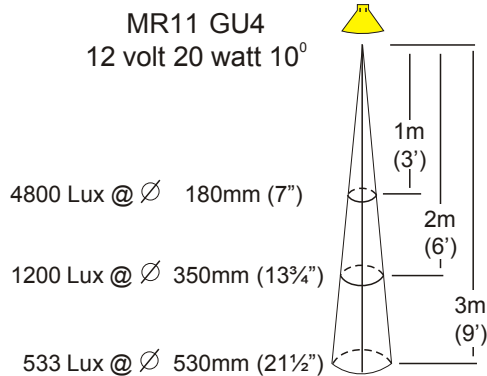

HUNZA™ PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
[http://www.hunzalighting.com/
contact.php](http://www.hunzalighting.com/contact.php)

Specification may change without notice.
Manufactured in New Zealand.
© 2016 Hunza Holdings Ltd.