

Adjustable Linear Lite

PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS

IP67 CE




LED Chip	Cree J Series 3030 X 96 replaceable linear board
Luminaire Output	1000 Lumens @ 14.4 watts, Delivered from Luminaire with 3000K unobstructed beam.
Lumens Per Watt	70 Lumens minimum @ 14.4 watts, Delivered from Luminaire with 3000K unobstructed beam
CRI (3000K)	90+ Standard
Colour Temperatures	3000K, 4000K
Beam Angles	Asymmetric
Ingress Protection	IP67
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	CE UL1598,2108,1838 (Pending)

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. ALL/L

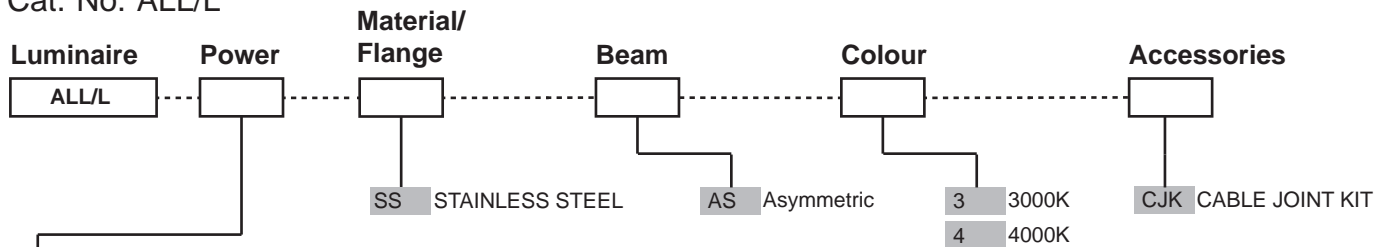

- D24 24VDC REMOTE
- R RETRO, 120-277vac INPUT

24VDC REMOTE:
Constant voltage driver Fixture requires 24vdc @ 700mA maximum

RETRO 110-277vac DRIVER:
Constant Voltage driver (included)
Input: 120,240,277 volts
Output: 17 watts total 24vdc @ 700mA

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined or cast from one of the following metals:

Body - Cast from virgin high corrosion resistant, low copper content (0.001%) aluminium alloy.
 Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder coat colour.
 Colour - Black.

Flange:

Machined from 316 Stainless Steel
 720mmx100mmx5mm (28 11/32" x 4" x 13/64")

All fixings are made from 316 Stainless Steel

Step Lens:

10mm (25/64") Extra clear, low iron, shatter resistant glass. Lifetime warranty

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Cable:

Water resistant rubber

Adjustability:

The inner rotating body is fully adjustable, allowing 0-90° of rotation within the fixture.

Mounting:


The In-ground linear light comes with a 1.2mm stainless steel mounting canister for casting into the ground or into concrete. Maximum drive over speed 10 kp/h (6mp/h) with a maximum load rating of 2000kgs (4400lbs).

Luminaire Weight:


10kg (22lbs 1oz)

BEAM ANGLES

IES files available for download: www.hunzalighting.com/download.php




DIMENSIONS

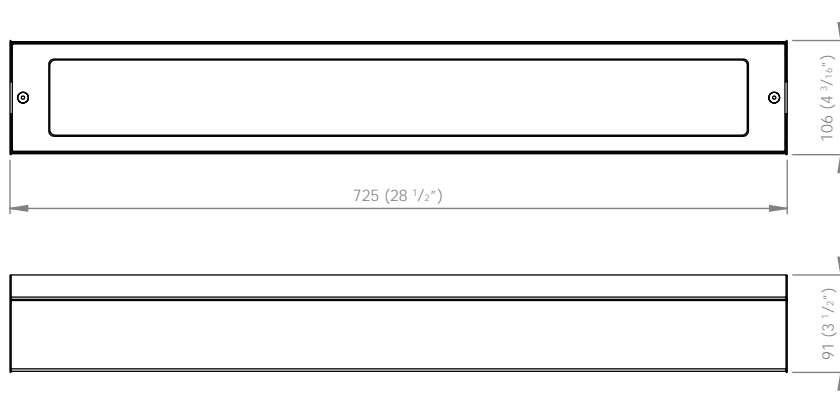

WIRING GUIDE

available for download: www.hunzalighting.com/download.php

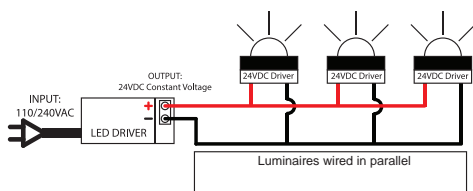

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

