


Hanging Lite High Power PURE LED

PROJECT:
TYPE:
SOURCE:
NOTES:

SPECIFICATIONS



LED Chip	Cree CXA1512 Plug and Play field replaceable LED board
Luminaire Output	1200 Lumens @ 700mA delivered from luminaire with unobstructed beam.
Lumens Per Watt	100Lumens @ 12 watts minimum, delivered from luminaire with unobstructed beam
CRI (3000K)	85+ Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	15, 30, 40, 70
Ingress Protection	IP66
Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	AS/NZS 61046 cUL 1838, 2108 CSA C22.2 No. 250.7, No. 250.0-08 CE

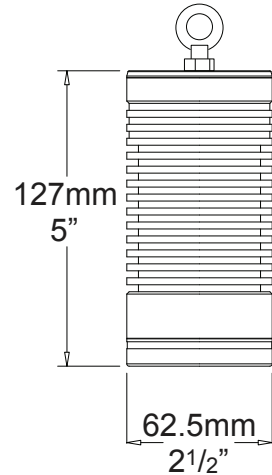

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. HL/HP

Luminaire	Power	Material/Finish	Beam	Colour	Accessories
<input type="text" value="HL/HP"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<ul style="list-style-type: none"> <input type="checkbox"/> SR 700mA Input, Series Wired 12W <input type="checkbox"/> D24 24VDC Input, Parallel Wired 	<ul style="list-style-type: none"> <input type="checkbox"/> EBK BLACK <input type="checkbox"/> EBZ BRONZE <input type="checkbox"/> EOGR OLIVE GREEN <input type="checkbox"/> EWH WHITE <input type="checkbox"/> EWB WHITE BIRCH <input type="checkbox"/> EDG DARK GREY <input type="checkbox"/> ESTAR SILVER STAR <input type="checkbox"/> ECT CORTEN 	<ul style="list-style-type: none"> <input type="checkbox"/> 15 15° <input type="checkbox"/> 30 30° <input type="checkbox"/> 40 40° <input type="checkbox"/> 70 70° 	<ul style="list-style-type: none"> <input type="checkbox"/> 2 2700K <input type="checkbox"/> 3 3000K <input type="checkbox"/> 4 4000K <input type="checkbox"/> 39 3000K, 90+ CRI 	<ul style="list-style-type: none"> <input type="checkbox"/> HCL HEX CELL LOUVRE KIT <input type="checkbox"/> SNT SNOOT <input type="checkbox"/> GG GLARE GUARD <input type="checkbox"/> LF FROSTED LENS <input type="checkbox"/> CJK CABLE JOINT KIT 	

SERIES REMOTE DRIVER:
Constant current driver (included) individual fixtures require 18vdc @ 700mA maximum. 0-10 volt dimming.

24VDC DRIVER:
Input: 24vdc
Output: 18vdc @ 700mA constant current (non dimming).
Note: not for USA.

ADDITIONAL COMMENTS:

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Body: high corrosion resistant 63.5mm solid aluminium tube with chromate substrate and high UV resistant polyester "E" powder coat.

Colours:

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

10mm (3/8") Extra clear, low iron, shatter resistant glass.
Lifetime warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Mounting:


Hung via the provided stainless steel cable.

Luminaire Weight:

Low voltage:

Alum: 0.870 (1lb 15oz)


ACCESSORIES

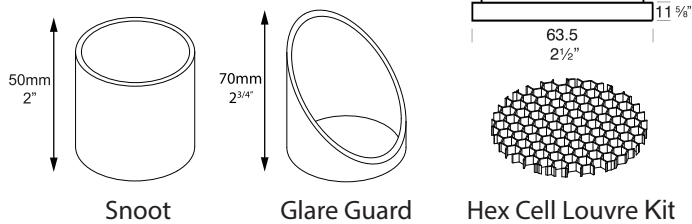

BEAM ANGLES


High efficiency PMMA TIR lenses. Field replaceable

IES files available for download: hunzalighting.com/downloads

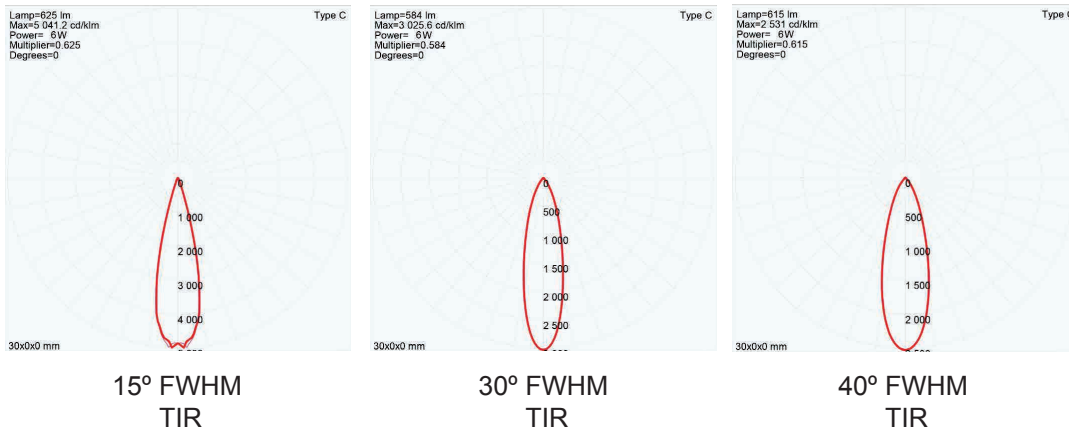

WIRING GUIDE


Series/remote driver

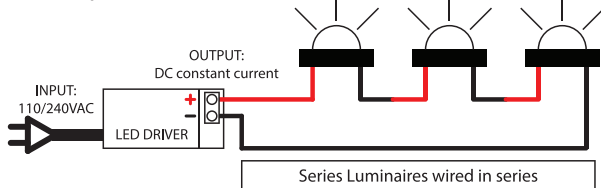

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Available for download: hunzalighting.com/downloads

24vdc integral driver

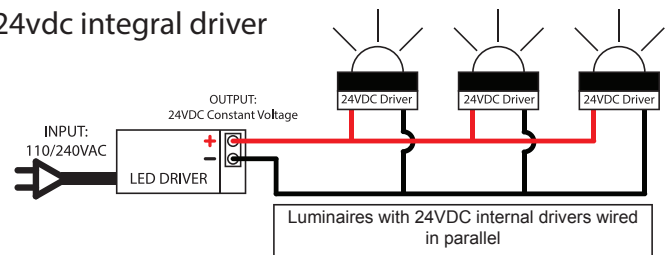

Specifications may change without notification

Aug 2017