HUNZA PURE OUTDOOR LIGHTING **Mouse Light**

with PURE LED


SPECIFICATIONS

PROJECT:

TYPE:

SOURCE:

NOTES:

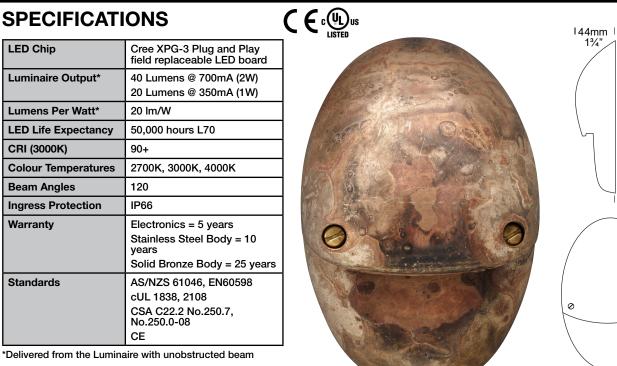

PRODUCT CONFIGURATION

Cat. No. MOUSE/L

Please fill in appropriate codes into boxes provided

89mm 31⁄2"

130mm

51/8"

I

Luminaire	Power	Material	/Finish	Beam		Colour	Acce	essories	
D3 12VAC D7 12VAC D24 24VDC	A Input, Series Wire , 350mA Parallel W , 700mA Parallel Wi Dinput, Parallel Win nput, Retro, Parallel	Vired 1W Vired 2W red	SBZ SS	Solid Bronze Stainless Steel	120 120	° 2 3 4	2700К 3000К 4000К	СЈК	Cable Joint Kit
S - Series Remote Driver Power Supply: Constant current driver REQUIRED - NOT SUPPLIED Fixture Input: Individual fixtures require 3 Vf@ 700mA maximum D3 D7 - 12VAC Input Power Supply: Line/Mains to 12VAC Transformer			R - 240VAC Retro Driver Fixture Input: 240vac, 3 watt total (driver included) Fixture Output: 3vdc, 700mA Not UL approved. Not available in USA.						
Fixture Input: include) Fixture Output: D24 - 24VDC Fixture Input: Fixture Output: (non dimming). Note: not for USA	T SUPPLIED 12VAC, 3watt tota D3 = 3Vf @ 350mA D7 = 3Vf @ 700mA Driver 24VDC 18Vf @ 700mA cor	l (driver A 1W A 2W	Additi	ional Comments	::				
					*Due to co	ntinued prod	uct enhanceme	nts, specificatior	ns may change without notificati



HUNZA LIGHTING 130 Felton Mathew Ave Saint Johns Auckland 1072 New Zealand

Ph: +64-9-528 9471 Fax: +64-9-528 9471 hunza@hunza.co.nz www.hunzalighting.com INTERNATIONAL CONTACTS: www.hunzalighting.com/contact

This document contains proprietary information of HunzaTM. Its receipt or possession does not convey any rights to reproduce or disclose its content.

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Solid Bronze:

Investment cast in solid bronze with forge mounting plate.

316 Stainless Steel:

Investment cast in 316 stainless steel with investment cast 316 stainless steel mounting plate.

Lens:

2mm (1/16") frosted tempered shatter resistant glass. Lifetime Warranty.

BEAM ANGLES

Cable

Water resistant rubber SWOOJ cable with HUNZA[™] Anti-Syphon[™] barrier system

Mounting:

Mount using a mounting plate fixed to the wall with 316 stainless screws. The luminaire is then fitted to the back plate using two pan head screws.

Luminaire Weight: SBZ: 0.820kg (1lb 13oz) SS: 0.750kg (1lb 10oz)



WIRING GUIDE

INPUT:

110/240VAC

Available for download: hunzalighting.com/downloads

NOTE: Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.

Series/Remote Driver


OUTPUT:

4


I FD DRIVER

HUNZ

12VAC Integral Driver

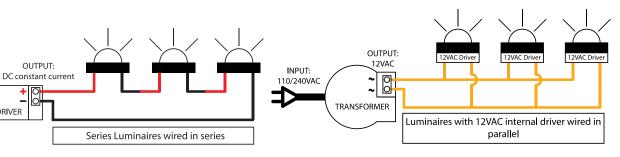

110/240V Integral Driver

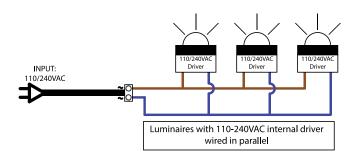

HUNZA LIGHTING

Auckland 1072

New Zealand

130 Felton Mathew Ave Saint Johns

Ph: +64-9-528 9471

Fax: +64-9-528 9471

hunza@hunza.co.nz

www.hunzalighting.com


OUTPUT: 24VDC Constant Voltage INPUT: 110/240VAC LED DRIVER Luminaires with 24VDC internal drivers wired in parallel

*Due to continued product enhancements, specifications may change without notification

INTERNATIONAL CONTACTS: May 2022 V3

www.hunzalighting.com/contact This document contains proprietary information of Hunza[™]. Its receipt or possession does not convey any rights to reproduce or disclose its content.

IES files available for download: hunzalighting.com/downloads



120°