
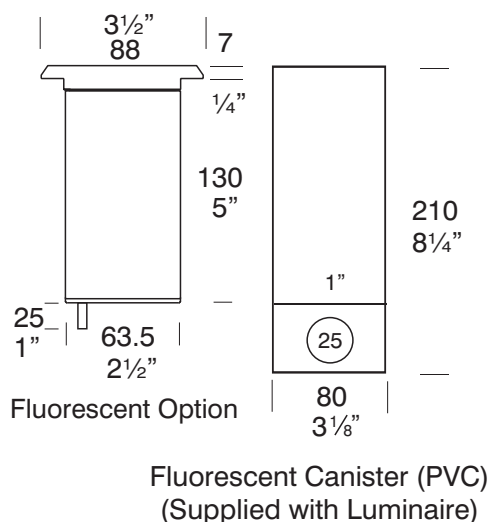


Square on Square

Cat. No. FLSQ/SQ

Cat. No. SLSQ/SQ

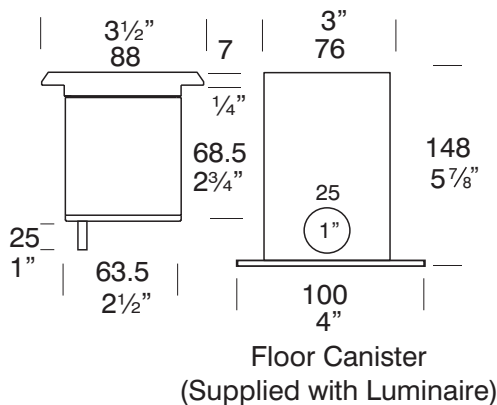

Square on Square is a second glass (frosted) which is recessed flush into a HUNZA square flange. This gives a contemporary look for modern installations. This option is available for Floor and Step Lite luminaires with square flanges in Clover, Cross, Grill and Spot design.

A 110 / 240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

Ordering Information

Luminaire Type	Material	Accessories
FLsq/sq - Floor Lite	Copper 316 Stainless Steel	CJK150 - Cable Joint Kit Canss - 316 Stainless Steel Canister DFL - Frost Lens Dkcan - Deck Canister FLcan - Floor Lite Canister FL - Fluorescent Option Flucan - Fluorescent Canister HCL - Hex Cell Adaptor (Note: Supplied as standard for USA/Canada) LED - LED Array D/LED - LED Driver
Flange		
CL - Clover CR - Cross GR - Grill SP - Spot		

Ordering Example: FL CRsq/sqcop - Floor Lite Cross Square Copper

SL SPsq/sqflcop - Step Lite in Copper Spot Square with fluorescent option

FL - Fluorescent Option 110 / 240 volt.
(Accessories ordered separately)

Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.
© 2006 Hunza Holdings Ltd

Ver 1.3

Luminaire Construction

CNC machined from:

Body:

Copper and 316 Stainless Steel
63.5mm (2½") x 9mm (11/32") . End
cap - solid 316 stainless steel
63.5mm (2½") rod.

Flange:

90mm x 90mm (3½" x 3½") solid
copper and 316 stainless steel bar.

Mounting

The luminaire is pushed into the
canister and is held by two silicone
"O" rings : Canss, FLcan, FLucan
are cast into concrete, brick,
concrete block, etc.

Dkcan: mounted into wooden
decks, wooden frames, etc.

Features

Lenses:

3mm (1/8") clear tempered shatter
resistant glass.

Life Time Warranty.

Gasket:

Silicone, iron impregnated 220°c
(428°f).

Lamp Holders:

GU5.3 - 350°c (662°f) ceramic multi
contact lamp holder with 250°c
(480°f) teflon cables.

Fluorescent

E27 PET 210° (410°f) base mount.

Accessories:

Cable Joint Kit (Cat. CJK 50)
Not approved for USA /Canada.

Deck Canister (Cat. Dkcan).

Frosted Lens (Cat. DFL).

Floor Canister (Cat. Flcan).

Fluorescent Canister PVC (Cat.
Flucan).

Fluorescent Option 110 / 240 volt
(Cat. FL) IP66.

Hex Cell Louvre Adaptor (Cat. HCL)
(Note: Supplied as standard for
USA/Canada).

316 Stainless Canister for use in
lime stone etc. (Cat. Canss).

LED Array Red, Blue, White, Yellow,
Green (Cat. LED). Refer sheet 8.4

LED Driver (Cat. D/LED) Refer
sheet no. 8.4

Standards

EN60598

IP66 / IP68



UL1838

Luminaire Weight

SS 1.175kg (2lb 9oz)

Fluorescent IP66

SS 1.810kg (3lb 15oz)

Power Supply

HUNZA® Inground or Wall Mount
Transformer: not included.

LED - Refer sheet no. 8.4

USA and Canada:

HUNZA® Wall Mount Transformer:
not included.

LED - Refer sheet no. 8.4

Luminaire :supplied with

MR16 GU5.3 - 20 watt lamp max.

LED

LED - Refer sheet no. 8.4

Fluorescent




E27 - 110 / 240 volt self ballasted
lamp.

USA and Canada:

MR16 GU5.3 20 watt lamp max.

LED

LED - Refer sheet no. 8.4.

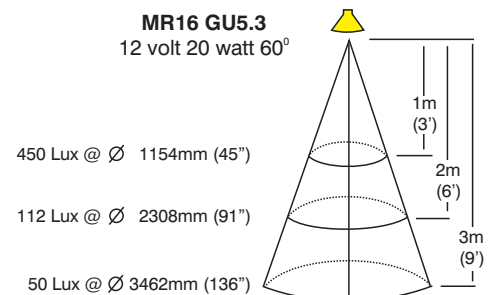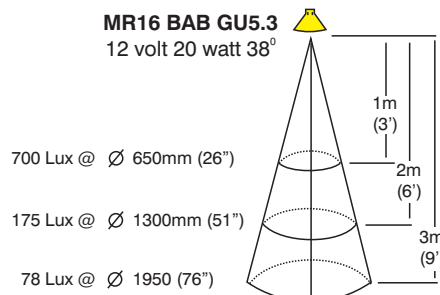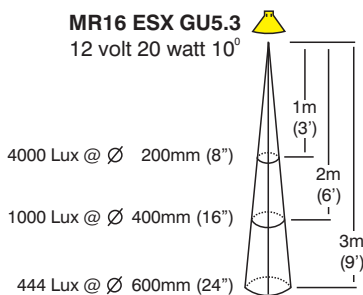

These diagrams refer to the Spot Lite Flange (D) only.



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2006 Hunza Holdings Ltd

Ver 1.3