

BEGA**31 263**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source for many lighting tasks on or in buildings.

Product description

Luminaire made of copper and stainless steel
Opal glass with screw neck
Silicone gasket
Wall mounting with a mounting plate made of stainless steel, Steel grade number 1.4301
Mounting plate with 2 fixing holes \varnothing 5.5 mm · 70 mm spacing
1 cable entry for mains supply cable up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Connecting terminal 2.5^{\square} with plug connection
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
Impact strength IK05
Protection against mechanical impacts < 0.7 joule
 – Safety mark
CE – Conformity mark
Weight: 1.6 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

Lamp

Luminaire with lampholder E 27
Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:


13 510 LED 7 W · 805 lm · 2700 K

13 548 LED 7 W · 805 lm · 2700 K
dimmmable

13 584 LED 7 W · 805 lm · 3000 K

13 586 LED 7 W · 805 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

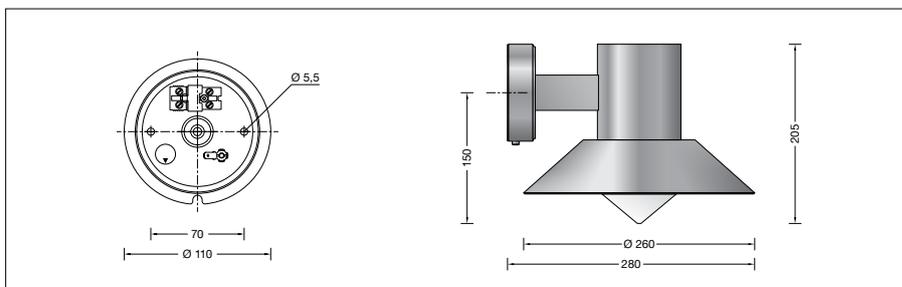

Light technique

Part of the light shines upwards through a slit in the reflector shield.
The shape of the luminaire thus remains visible, even in the dark.