


Single Pole Lite

Cat. No. SPL

Cat. No. SPL/R

Cat. No. SPLGU

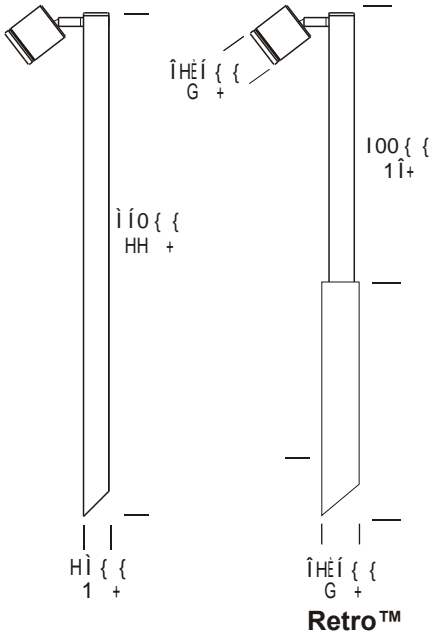

L { inaire Type

Taterial/Finis@

- lack
- Z - ronze
- CT - Corten
- G - ark Grey
- OG - Olive Green
- STAR - Silver Star
- hite irch
- H - hite
- COP - Copper
- SS - Stainless Steel

- CJK150 - Cable Joint Kit
- GG - Glare Guard
- HCL - Hex Cell Louvre
- LENSSTEPF - Frosted Lens

eça { ple

: SPL BK - Single Pole Lite in Black
 SPL/R COP - Single Pole Lite Retro in Copper
 SPLGU SS - Single Pole Lite GU10 in Stainless Steel
 LENSSTEPF - Frosted Lens
 (accessories ordered separately)

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY 130
 Felton Mathew Ave
 Glen Innes
 Auckland 1072
 New Zealand

Ph: 64-9-528 9471
 Fax: 64-9-528 9361
 hunza@hunza.co.nz
 www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
 Manufactured in New Zealand.
 © 2011 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant powder coat.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

Body: 63.5mm (2½") x 10mm (3/8").

End cap: solid aluminium 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 850mm (33½") aluminium tube.

Retro pole: 38.1mm (1½") x 400mm

(15½") and 63.5mm (2½") x 450mm (17½") aluminium tube.

Copper

Body: 63.5mm (2½") x 10mm (3/8").

End cap: solid copper 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 850mm (33½") copper tube.

Retro pole: 38.1mm (1½") x 400mm

(15½") and 63.5mm (2½") x 450mm (17½") copper tube.

316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8").

End cap: solid stainless steel 63.5mm (2½") rod.

Pole: 38.1mm (1½") x 850mm (33½") stainless steel tube.

Retro pole: 38.1mm (1½") x 400mm

(15½") and 63.5mm (2½") x 450mm (17½") stainless steel tube.

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lamp Holder

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Glare Guard (Cat. GG).

Hex Cell Louvre (Cat. HCL).

Frosted Lens (Cat. LENSSTEPF).

Swivel

Aluminium and Copper luminaires - 360° rotation and 0-90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0-90° elevation, full stainless steel construction.

Standards

IP56/66, UL1838,



Luminaire Weight

12 volt - Aluminium - 1.000kg (2lb 3oz)

Copper - 2.300kg (5lb 1oz)

Stainless Steel - 2.100kg (4lb 10oz)

Retro - Aluminium - 2.100kg (4lb 10oz)

Copper - 3.300kg (7lb 4oz)

Stainless Steel - 3.150kg (6lb 15oz)

Power Supply

12 volt - Hunza Inground or Wall Mount Transformer: not included.

USA and Canada

Hunza Wall Mount Transformer: not included.

Retro - Hunza 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole.

Dimmable with a suitable dimmer.

Lamp Options








MR16 - 20, 35 or 50 watt lamp max.

GU10 - 25 or 35 watt lamp max.

USA and Canada

MR16 - 20 or 35 watt lamp max.

GU10 - lamp not supplied.

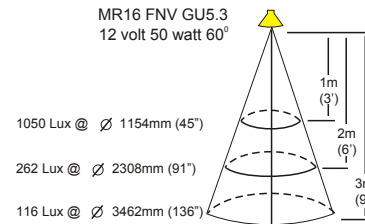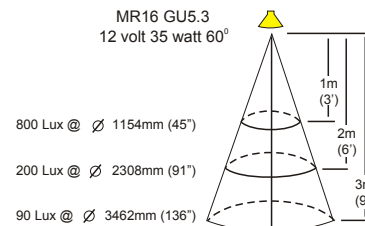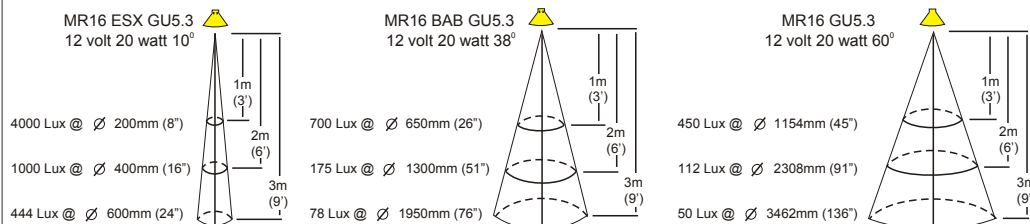

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY 130
Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.