
PURE **PROJECT:** OUTDOOR LIGHTING TYPE: **Cube Bollard Cloak** SOURCE: NOTES: **PURE LED** SPECIFICATIONS 40mm 40mm 9/16 1 9/16 LED Chip Cree XPG-3 Plug and Play field replaceable LED board 1 120 Lumens @ 700mA, 70 Lumens Luminaire Output Per Head @ 350mA delivered from luminaire with unobstructed beam. 70 Lumens minimum @ 1 watt, 60 **Lumens Per Watt** Lumens @ 2 watts delivered from luminaire with unobstructed beam CRI (3000K) 90+ 446mm* 590mm* 23 ¼" 17 9/16' **Colour Temperatures** 2700K, 3000K, 4000K, Amber, Blue, Green, Red Asymmetric **Beam Angles Ingress Protection** IP66 Electronics = 5 years Warranty Body Aluminium = 5 years 60mm AS/NZS 61046 Standards 2 3/8 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, *Custom pole lengths available Flange Mount No. 250.0

PRODUCT CONFIGURATION

CE

Please fill in appropriate codes into boxes provided

Cat. No. CBOLCL(1-4)/L

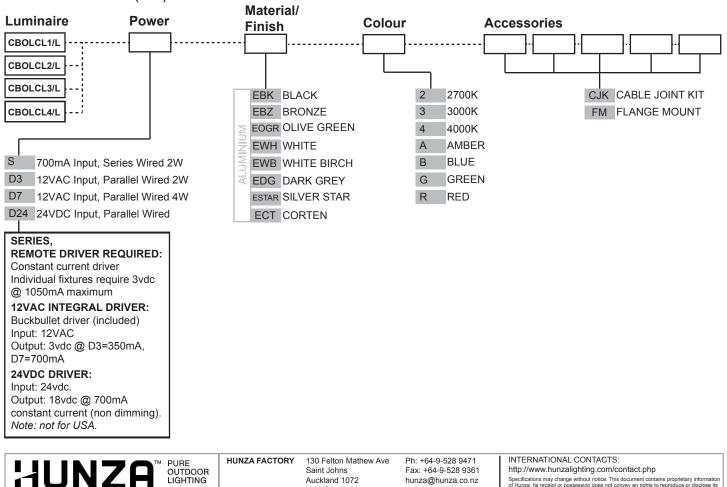

Auckland 1072

New Zealand

hunza@hunza.co.nz www.hunzalighting.com

Specifications may change without notice. This document contains proprietary inform of Hunza. Its receipt or possession does not convey an rights to reproduce or disclose

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Pole: High corrosion resistant 40mm (11/2") x 4mm (3/16") aluminium square tube. Head: 40mm (11/2") x 40mm (11/2") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat. Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

Acrylic lens. Do not clean with petrochemical substances.

Gaskets:

Silicone, iron impregnated 220°C (428°F)

ACCESSORIES

BEAM ANGLES

Mounting:

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.


Luminaire Weight:

Alum: 0.500kg (1lb 2oz)

IES files available for download: hunzalighting.com/downloads

WIRING GUIDE

Available for download: hunzalighting.com/downloads

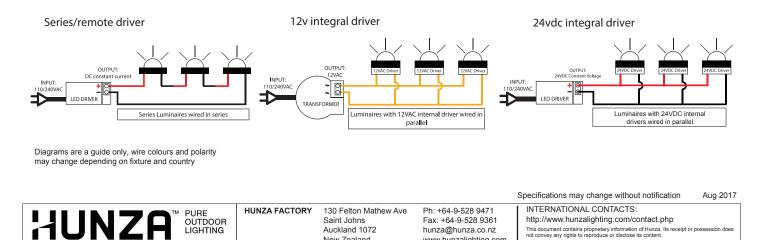

www.hunzalighting.com

New Zealand