

# Cube Pole Spot **PURE LED**

PROJECT:	
TYPE:	_
SOURCE:	
NOTES:	


# **SPECIFICATIONS**






LED Chip	Cree XPG-3 Plug and Play field replaceable LED board
Luminaire Output Per Head	200 Lumens @ 700mA, delivered from luminaire with unobstructed beam.
Lumens Per Watt	67 Lumens minimum @ 1 watt, delivered from luminaire with unobstructed beam
CRI (3000K)	90+
Colour Temperatures	2700K, 3000K, 4000K, Amber, Blue, Green, Red
Beam Angles	15, 25, 45
Ingress Protection	IP66

Warranty	Electronics = 5 years Body Aluminium = 5 years	
Standards	AS/NZS 61046 cUL 1838, 2108 CSA 22.2 No. 250.7, No. 250.0-08, No. 250.0 CE	

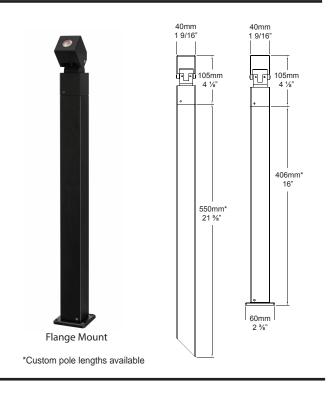

# PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

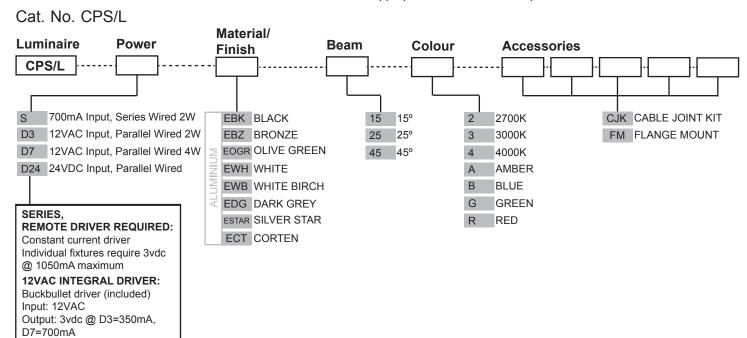

24VDC DRIVER: Input: 24vdc.

Note: not for USA.

Output: 18vdc @ 700mA constant current (non dimming).

### **LUMINAIRE CONSTRUCTION**

CNC machined from one of the following metals:

Aluminium:

Pole: High corrosion resistant 40mm ( $1\frac{1}{2}$ ") x 4mm (3/16") aluminium square tube. Head: 40mm ( $1\frac{1}{2}$ ") x 40mm ( $1\frac{1}{2}$ ") solid aluminium square bar, with chromate substrate and high UV resistant polyester powder coat.

Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

Lens:

Colours:

Acrylic TIR lens.

Do not clean with petrochemical substances.

Gaskets

Silicone, iron impregnated 220°C (428°F)

#### Mounting:

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.


Luminaire Weight:

Alum: 0.500kg (1lb 2oz)

# **ACCESSORIES**


# **BEAM ANGLES**

IES files available for download: hunzalighting.com/downloads

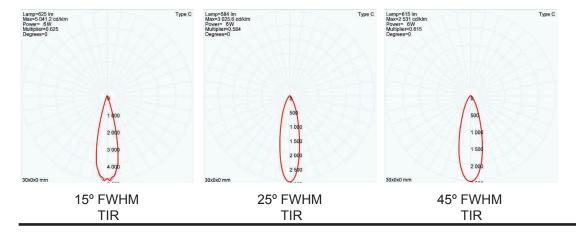

### **WIRING GUIDE**

Available for download: hunzalighting.com/downloads

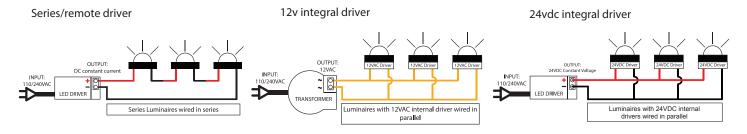

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country

Specifications may change without notification

Aug 2017