

Blade with PURE LED

PROJECT:


TYPE:

SOURCE:

NOTES:

SPECIFICATIONS IP68* IK10 CE

LED Chip	Cree XPG-3 X 12 replaceable linear board
Luminaire Output*	2300 Lumens @ 700mA (26 watts)
Lumens Per Watt*	85 Lumens minimum @ 26 watts
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+ Standard
Colour Temperatures	2700K, 3000K, 4000K, Blue, Amber
Beam Angles	15, 30, 60, 35x15
Inverse Kinematics Rating	IK10
Ingress Protection	IP68 *not for use in pool or ponds
Warranty	Electronics = 5 years Aluminium Body = 5 years
Standards	BS/EN 60598.2.2 CE
B Number	94.05

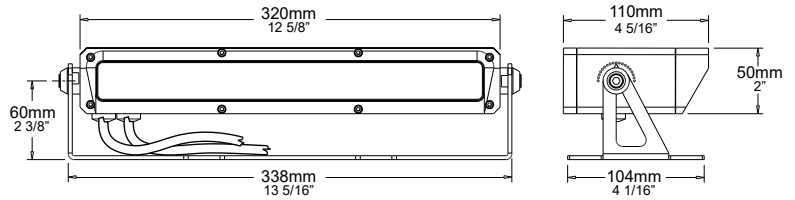

*Delivered from the Luminaire with 3000K unobstructed beam

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. BLD/L

Luminaire	Power	Material/Finish	Beam	Colour	Accessories		
BLD/L							
SR	700mA CC Input, Series Wired 26W	ALUMINIUM EBK BLACK EBZ BRONZE EOGR OLIVE GREEN EWH WHITE EWB WHITE BIRCH EDG DARK GREY ESTAR SILVER STAR ECT CORTEN	15	15°	2	2700K	CJK Cable Joint Kit
D24	24VDC Input, Parallel Wired 26W		30	30°	3	3000K	FL Frosted Lens
R	110-277VAC Retro™ Integral Driver		60	60°	4	4000K	
RD	110-277VAC Retro™ Integral Driver with Dimming		OV	35x15°	A	Amber	
					B	Blue	

<p>SR - Series Remote Driver Power Supply: Constant current driver INCLUDED - SUPPLIED SEPARATELY Wiring Method: Wired in series Fixture Input: Individual fixtures require 37Vf @ 700mA maximum, 26 Watts</p>
<p>D24 - 24VDC Power Supply: Line/Mains to 24VDC constant voltage driver REQUIRED NOT SUPPLIED. Wiring Method: Parallel Fixture Input: 24VDC constant voltage NOTE: NOT FOR USA</p>
<p>R RD - Retro™ 110-277VAC Driver Power Supply: Line/Mains input to integrated driver INCLUDED Fixture Input: 120, 240, 277 VAC Fixture Output: 700mA @ 26Watts Dimming Option (RD): 0-10 volt dimming.</p>

Additional Comments:

Apr 2022 V3

*Due to continued product enhancements, specifications may change without notification.

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Body - solid high corrosion resistant 50 x 75mm (2 x 3") aluminium bar.

Finished with chromate substrate, Epoxy layer and a UV resistant polyester powder coat colour.

Fixings and Brackets - made from 316 Stainless Steel

Colours:

Black, Bronze, Silver Star, White, Birch, Olive Green, Dark Grey, Corten.

Lens:

10mm (3/8") Extra clear, low iron, shatter resistant glass.

Lifetime warranty

Gaskets:

Silicone, iron impregnated 220°C (428°F)

Cable:

Water resistant rubber SWOOJ cable with HUNZA™ Anti-Syphon™ barrier system.

Mounting:

The mounting bracket is fixed to the surface using stainless screws.

Luminaire Weight:


4kg (9 lbs)




BEAM ANGLES

High efficiency PMMA TIR lenses. Field replaceable


IES files available for download: hunzalighting.com/downloads




15° FWHM OPTIC



30° FWHM OPTIC



60° FWHM BATWING OPTIC

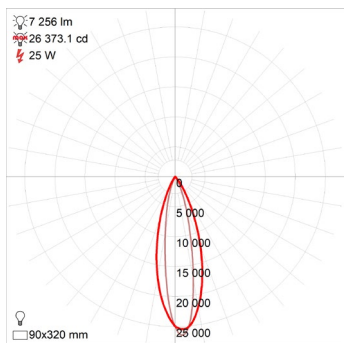


35 x 15° OVAL FWHM OPTIC

WIRING GUIDE


Available for download: hunzalighting.com/downloads

NOTE: Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


Series/Remote Driver

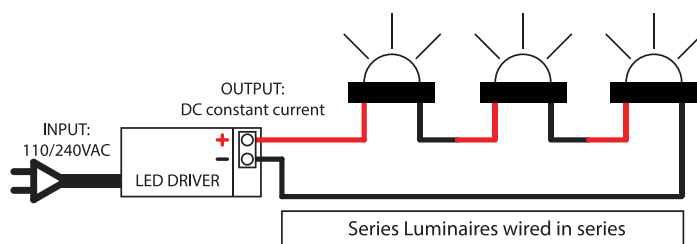

110/240V Integral Driver

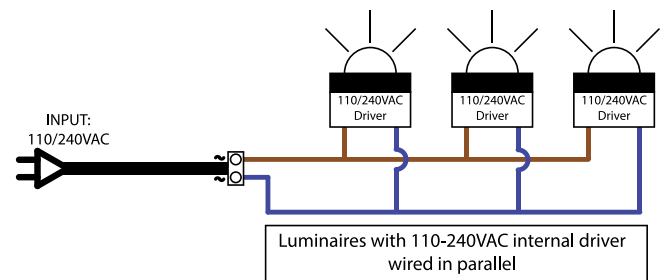

24VDC Integral Driver

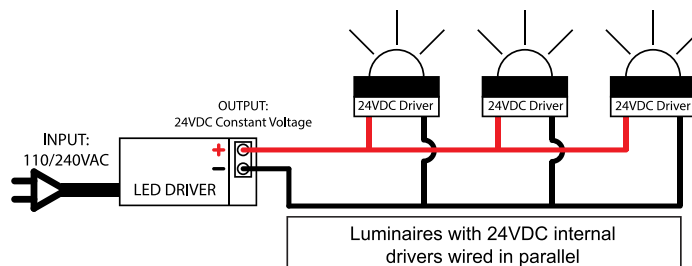

Apr 2022 V3

*Due to continued product enhancements, specifications may change without notification.



HUNZA LIGHTING
130 Felton Mathew Ave
Saint Johns
Auckland 1072
New Zealand

Ph: +64-9-528 9471
Fax: +64-9-528 9471
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
www.hunzalighting.com/contact

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content.