

Ultra 35 Liquid Beam™ Wall Spot Light - RGBW

INTELLIGENT LUMINAIRE




SPECIFICATIONS



LED Chip	LED ENGINE LZ4 RGBW
Luminaire Output	400 total Lumens all colours on, delivered from the Luminaire with unobstructed beam
Lumens Per Watt	30 Lumens minimum @ 13 watts, delivered from Luminaire with unobstructed beam
CRI (5400K)	RGBW (White 75)
Colour Temperatures	RGBW (White CCT 5400)
Beam Angles	Liquid Beam™ Technology Solid State Control 10 to 50 Deg
Ingress Protection	IP66

Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	BS/EN 60598.2.2 cUL 1598, CSA C22.2 No. 250.0 CE

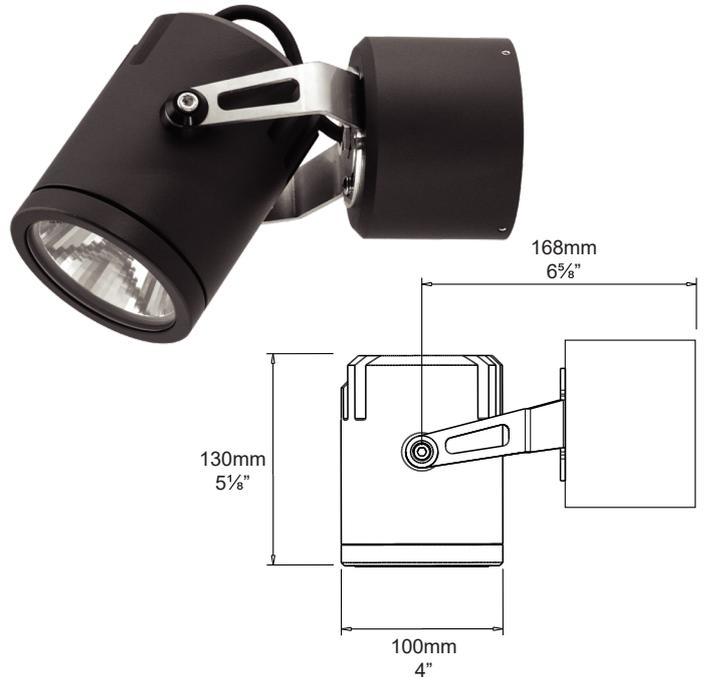

CASAMBI +

Smart Lighting Bluetooth Ecosystem


Liquid Beam™

A Solid State Light Beam controlled via Bluetooth, adjustable between 10-50 degrees. No need to service the fixture to adjust the beam.

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. WS/U35/LBRGBW

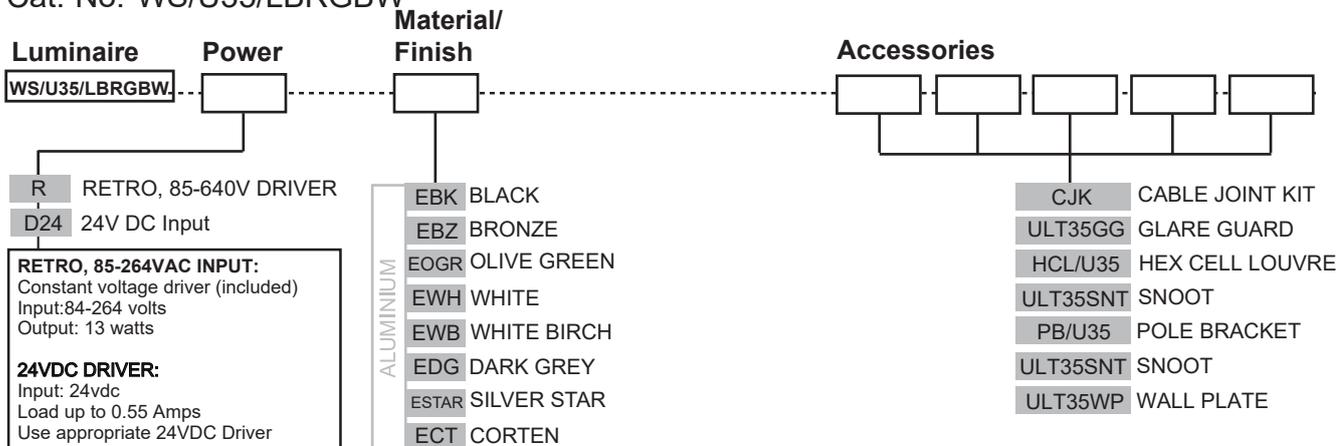

ADDITIONAL COMMENTS:

Full hue spectrum & colour temperature control with Casambi. Bluetooth Mesh enabled via CASAMBI (free to download Lighting Control App) 10-50 Degree beam angle control with Liquid Beam™ Solid State Control. No external control gear required.

LUMINAIRE CONSTRUCTION

CNC machined from one of the following metals:

Aluminium:

Base: 101mm (4") solid aluminium rod
 Body: 101mm (4") high corrosion resistant aluminium rod with chromate substrate and high UV resistant polyester powder coat.
 Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

316 Stainless Steel:

Bracket: laser cut and folded 316 stainless steel.

Adjustability:

The fully adjustable head allows 360 degree rotation and 0-120 degree elevation.

Cable:

Water resistant rubber.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Step Lens:

12mm (1/2") extra clear, low iron, shatter resistant glass.
 Lifetime warranty.


Mounting:

The mounting plate is fixed to the surface using three stainless steel screws. The luminaire is then fixed to the mounting plate. A large Wall Plate is available for mounting over junction boxes.


Luminaire Weight:

4kg (9lb)


ACCESSORIES




Glare Guard




Hex Cell Louvre



Pole Bracket



Snoot




Wall Plate
127mm (5")

BEAM ANGLES: Controlled with Liquid Beam™ Technology

Solid State Beam control Via Bluetooth Casambi App

IES files available for download: <http://www.hunzalighting.com/download.php>





10° 3648° 50°

Adjustable between 10° to 50°

WIRING GUIDE

Available for download: www.hunzalighting.com/download.php

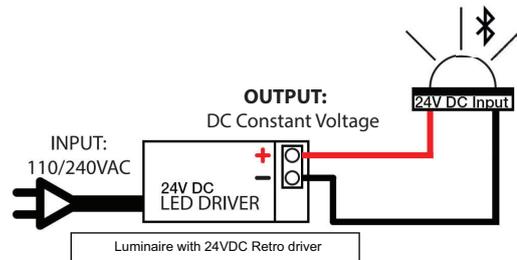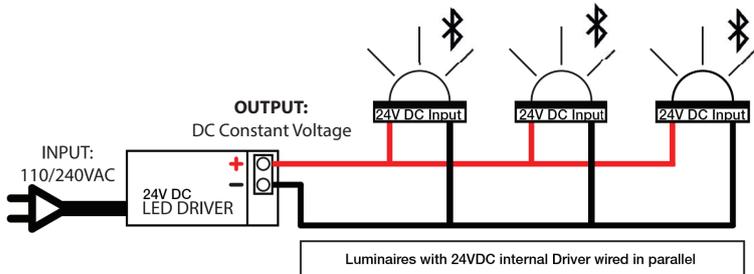

Try CASAMBI Smart Light Demo
 Free to Download on IOS or Android

CASAMBI



Specifications may change without notification

Oct 2021 V1

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
 130 Felton Mathew Ave
 Saint Johns
 Auckland 1072
 New Zealand

Ph: +64-9-528 9471
 Fax: +64-9-528 9361
 hunza@hunza.co.nz
 www.hunzalighting.com

INTERNATIONAL CONTACTS:
<http://www.hunzalighting.com/contact.php>

This document contains proprietary information of Hunza. Its receipt or possession does not convey any rights to reproduce or disclose its content.