

## Ultra 35 Liquid Beam™ Pole Spot Light - Tunable White



### INTELLIGENT LUMINAIRE

#### SPECIFICATIONS



LED Chip	Liquid Beam Tunable White LED
Luminaire Output	600 total Lumens all colours on, delivered from the Luminaire with unobstructed beam
Lumens Per Watt	80 Lumens @ 7.5 watts, delivered from Luminaire with unobstructed beam
CRI	80 Standard, 90 Available
Colour Temperatures	2700K - 5700K Tunable White
Beam Angles	Liquid Beam™ Technology Solid State Control 10 to 50 Deg
Ingress Protection	IP66

Warranty	Electronics = 5 years Body Aluminium = 5 years
Standards	BS/EN 60598.2.2 cUL 2108 CE

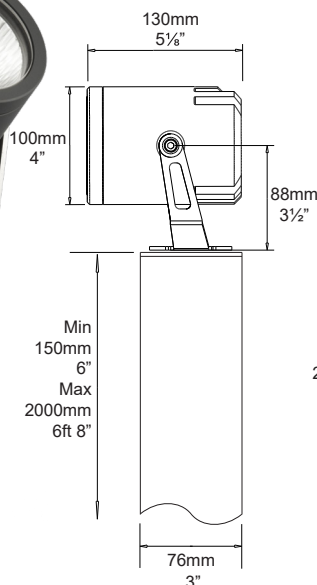

## CASAMBI +

### Smart Lighting Bluetooth Ecosystem

**Liquid Beam™**

A Solid State Light Beam controlled via Bluetooth, adjustable between 10-50 degrees. No need to service the fixture to adjust the beam.

#### PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Cat. No. PS/U35/LBTW

Luminaire	Power	Material/Finish	Accessories
<div>PS/U35/LBTW</div> <div>PS/U35FM/LBTW</div>			
<div>R RETRO, 100-240V DRIVER</div> <div>D24 24V DC Input</div> <div>RETRO, 100-240VAC INPUT: Constant voltage driver (included) Input: 100-240 volts Output: 13 watts</div> <div>24VDC DRIVER: Input: 24vdc Load up to 0.55 Amps Use appropriate 24VDC Driver</div>		<div>ALUMINIUM</div> <div>EBK BLACK</div> <div>EBZ BRONZE</div> <div>EOGR OLIVE GREEN</div> <div>EWB WHITE</div> <div>EWB WHITE BIRCH</div> <div>EDG DARK GREY</div> <div>ESTAR SILVER STAR</div> <div>ECT CORTEN</div>	<div>CJK CABLE JOINT KIT</div> <div>ULT35GG GLARE GUARD</div> <div>HCL/U35 HEX CELL LOUVRE</div> <div>ULT35SNT SNOOT</div> <div>MOUNTCAGE MOUNTING CAGE*</div>

\*Only available for Flange Mount Version

#### ADDITIONAL COMMENTS:

Full colour temperature control with Casambi. Bluetooth Mesh enabled via CASAMBI (free to download Lighting Control App) 10-50 Degree beam angle control with Liquid Beam™ Solid State Control. No external control gear required.

# LUMINAIRE CONSTRUCTION

**CNC machined from one of the following metals:**

**Aluminium:**

Body: 101mm (4") high corrosion resistant aluminium rod with chromate substrate and high UV resistant polyester powder coat.  
Pole: 76mm (3") aluminium tube.  
Colours: Black, Bronze, Silver Star, White, White Birch, Olive Green, Dark Grey, Corten.

**316 Stainless Steel:**

Bracket: laser cut and folded 316 stainless steel.

**Adjustability:**

The fully adjustable head allows 360 degree rotation and 0-120 degree elevation.

**Cable:**

Water resistant rubber.

**Gaskets:**

Silicone, iron impregnated 220°C (428°F).

**Step Lens:**

12mm (1/2") extra clear, low iron, shatter resistant glass.  
Lifetime warranty.


**Mounting:**

The pole is cast into concrete or mounted via flange mount - please refer to the Hunza website for mounting instructions.


**Luminaire Weight:**

4kg (9lb)


## ACCESSORIES




Glare Guard



Hex Cell Louvre



Mounting Cage




Snoot

## BEAM ANGLES: Controlled with Liquid Beam™ Technology

Solid State Beam control Via Bluetooth Casambi App



IES files available for download: <http://www.hunzalighting.com/download.php>

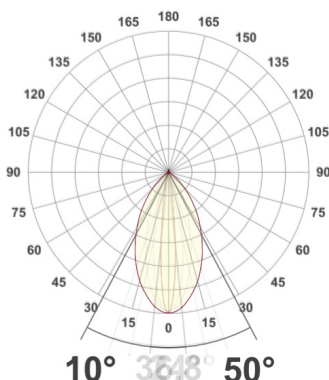

Adjustable between 10° to 50°

## WIRING GUIDE

Available for download: [www.hunzalighting.com/download.php](http://www.hunzalighting.com/download.php)

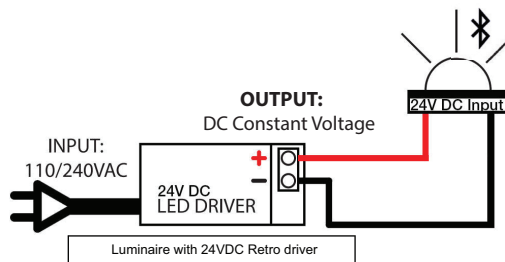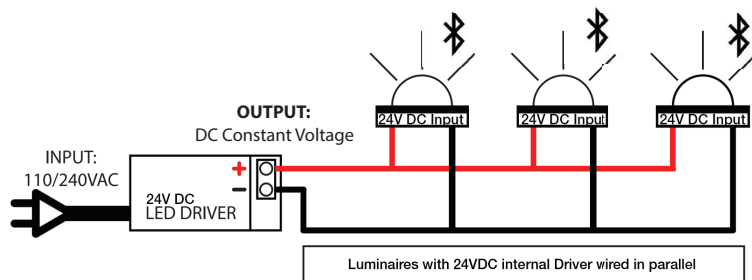

**CASAMBI**

Try CASAMBI Smart Light Demo  
Free to Download on IOS or Android



Specifications may change without notification

Oct 2021 V1

**HUNZA**™ PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**

130 Felton Mathew Ave  
Saint Johns  
Auckland 1072  
New Zealand

Ph: +64-9-528 9471  
Fax: +64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunzalighting.com](http://www.hunzalighting.com)

INTERNATIONAL CONTACTS:  
<http://www.hunzalighting.com/contact.php>

This document contains proprietary information of Hunza. Its receipt or possession does not convey any rights to reproduce or disclose its content.