

# Bollard 300

Cat. No. BOL300 Cat. No. BOL300FM Cat. No. BOL300FM90 Cat. No. BOL300GU





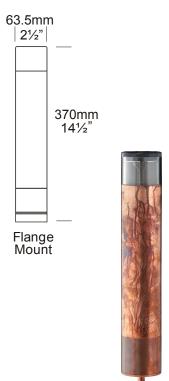


The Bollard 300 is ideal for garden edges. The acrylic lens reflects light at two angles through an anti-glare mesh directly onto the ground and horizontally to illuminate the surrounding landscape.

Constructed of tubular aluminium with a UV stable powder coated finish or machined from solid copper or 316 stainless steel.

A GU10 version of this luminaire is also available for line voltage lamps.

### **Ordering Information**

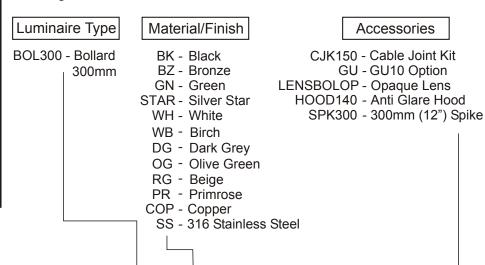

Ordering Example: BOL300 BK - Bollard 300 in Black

BOL300FM BK - Bollard 300 with 63.5mm Flange Mount in Black

BOL300FM90 COP - Bollard 300 with 90mm External Flange Mount in Copper

BOL300GU COP - Bollard 300 GU10 in Copper

HOOD140 BZ - Anti Glare Hood in Bronze

(Accessories ordered separately) -



#### **Luminaire Construction**

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, pole - 63.5mm(2½") x 3.25mm (1/8") x 240mm (9½") with chromate substrate and high UV resistant polyester powder coat.

**Colours** Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

**Copper** 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod pole - 63.5mm (2½") x 3.25mm (1/8") x 240mm (9½").

**316 Stainless Steel** 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod pole - 63.5mm (2½") x 3.25mm (1/8") x 240mm (9½").

### Mounting

Set in concrete in the ground or specify with flange mount option, which bolts to concrete, tiling or wooden decks.

#### **Features**

#### Lens:

UV stable polycarbonate with antiglare mesh and dual reflector projects light horizontally and at 45° onto the ground.

#### Gasket:

Silicone, iron impregnated 220°c (428°f).

### Lamp Holders:

GU5.3 & GU10 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

0 0

#### Accessories:

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada. Anti-Glare Hood (Cat. HOOD140). Opaque Lens (Cat. LENSBOLOP). GU10 Option (Cat. GU). 300mm (12") Spike (Cat. /300).

**Standards** 

6 **(§)**∗ UL1838

# Luminaire Weight

Alum .870kg (1lb 14oz) Cop 2.290kg (5lb) SS 2.170kg (4lb 12oz)

## **Power Supply**

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:


HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with MR16 GU5.3 20, 35, 50 watt lamp max.

GU10 - GU10 25 or 35 watt lamp max.

USA and Canada:

MR16 GU5.3 20, 35, 50 watt lamp max. **GU10 Halogen** - Lamp not supplied.

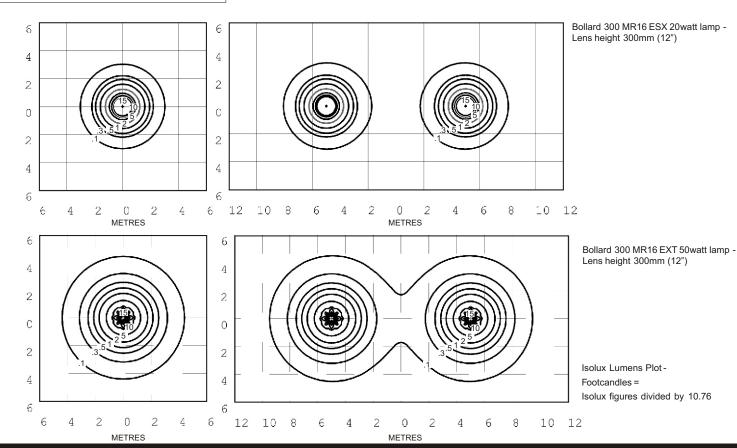

HUNZA PURE OUTDOO LIGHTING

HUNZA FACTORY 130 Felton Mathew Ave Glen Innes Auckland 1072 New Zealand Ph: 64-9-528 9471 Fax: 64-9-528 9361 hunza@hunza.co.nz www.hunzalighting.com INTERNATIONAL CONTACTS: http://www.hunzalighting.com/ contact.php

Specifications may change without notice. Manufactured in New Zealand. © 2016 Hunza Holdings Ltd.