Mini Bollard Cat. No. BOLMINI



63.5mm 2½"

50mm — — 1³⁄₄" 45mm


2"



Unobtrusive and low profile luminaire that provides soft lighting effects on decks, railings and posts. The lens reflects light at two angles through an anti-glare mesh **downwards** onto the ground and horizontally to illuminate the surrounding landscape. It is not suited for ground installation.

Constructed of tubular aluminium with a UV stable powder coated finish or machined from solid copper or 316 stainless steel.

Ordering Information

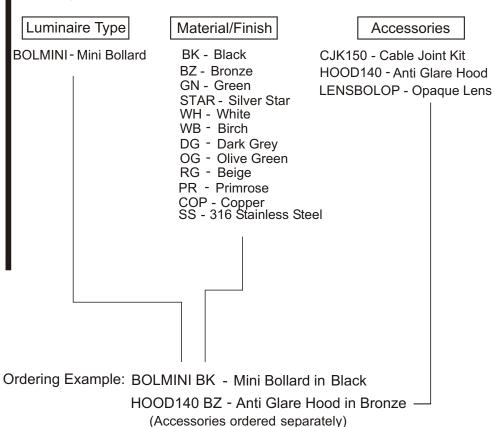

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") with chromate substrate and high UV resistant polyester powder coat.

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½").

316 Stainless Steel 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½").

Mounting

For mounting on top of posts, railings, etc. It is not suited for ground installation.

Features

Lens:

UV stable acrylic with anti-glare mesh projects light horizontally and at 45° onto the ground.

Gasket:

Silicone, iron impregnated 220°c (428°f).

Lamp Holders:

G4 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150)
Anti-Glare Hood - Not available in stainless steel (Cat. HOOD140).
Opaque Lens (Cat. LENSBOLOP).

Standards

€ UL1838

Luminaire Weight

Alum .37kg (13oz) Cop .6kg (1lb 5oz) SS .5kg (1lb 1oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with G4 20 watt lamp max. USA and Canada: G4 20 watt lamp max.

