HUNZA
PURE OUTDOOR LIGHTING

Verge
PureLED

Project _____


Type _____


Source _____

Notes _____

SPECIFICATIONS


LED Chip	Cree XHP-50-2 field replaceable LED board
Luminaire Output*	85 lumens @ 350mA (2W)
Lumens Per Watt*	42.5 lumens @ 2W minimum
LED Life Expectancy	50,000 hours L70
CRI (3000K)	90+
Ingress Protection	IP66
Warranty	Electronics = 5 years (Excludes third party lamps and power supplies) Aluminium = 5 years



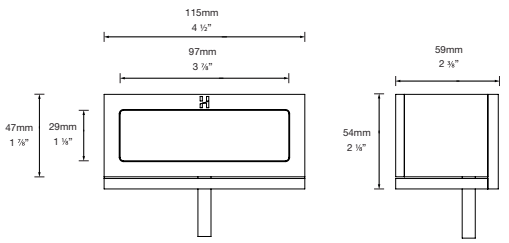

Surface Mount



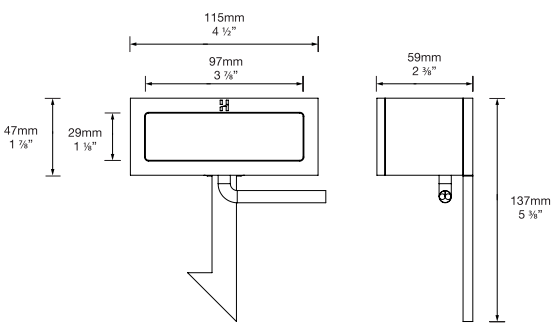

Spike Mount

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

Product Order Code: VRGSM/L

Luminaire

☑ VRGSM/L ☐ VRGSPK/L

Power

S	Constant Current Input, Parallel Wired, 2W & 4W Requires Constant Current Driver (not supplied). Fixture Input: 6Vf, 2W (350mA) & 4W (700mA).
D3	12VAC Input, Parallel Wired, 2W & 4W Requires Magnetic/Wire Wound 12VAC Transformer (not supplied). Fixture Input: 12VAC, 2W (350mA) & 4W (700mA).
D24	24VDC Input, Parallel Wired, 2W & 4W Requires 24VDC Constant Voltage Power Supply (not supplied). Fixture Input: 24VDC, 2W (350mA) & 4W (700mA).

Material/Finish

Aluminium Powder Coat Colours

EBK	Black
EBZ	Bronze
EOGR	Olive green
EWH	White
EWB	White Birch
EDG	Dark Grey
ESTAR	Silver Star
ECT	Corten
FS	Fine Silver

Colour

22	2200K
27	2700K
3	3000K
4	4000K

HUNZA
PURE OUTDOOR LIGHTING

Address
130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact
Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content. Due to continued product improvements, specifications may change without notification.

Installation, IES & Guides are available online

MADE IN NEW ZEALAND

LUMINAIRE INFORMATION

CNC machined from the following materials

Powder Coated Aluminium
Virgin, high corrosion resistant, low copper content (0.001%) aluminium with chromate substrate, and a highly UV-resistant polyester powder coat.

Gaskets
Silicone, iron impregnated 220°C (428°F).


Lens
10mm (3/8") extra clear, low iron, shatter resistant glass. Lifetime warranty.

Mounting
Surface Mount - Drill two 70mm (2 ¾") 14mm (1/2") mounting holes, remove the screws, mount the base plate, and reattach the screws.
Spike - Spike is inserted directly into the earth.


WIRING GUIDE

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country.


Circuit: Constant Current
Please see installation instructions for full details.

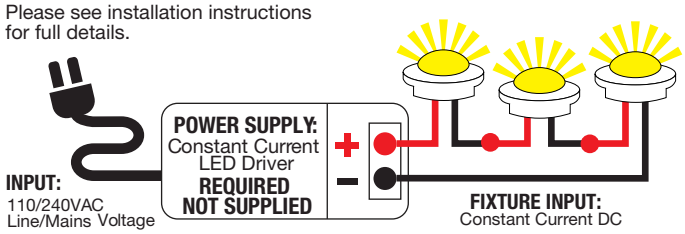

Circuit: 12VAC - Wire in Parallel
Please see installation instructions for full details.

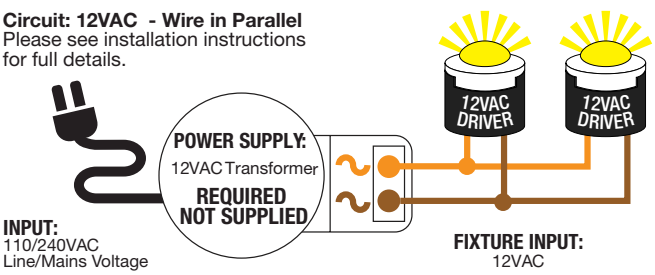

Circuit: 24VDC - Wired in Parallel
Please see installation instructions for full details.

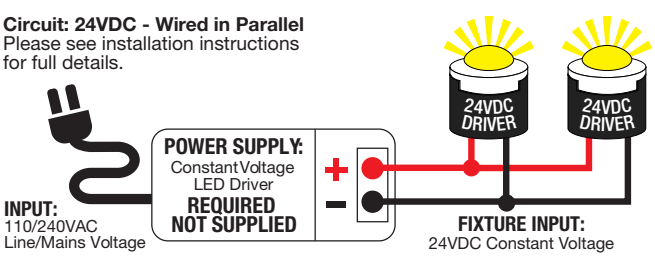

HUNZA
PURE OUTDOOR LIGHTING

Address
130 Felton Mathew Ave
Saint Johns, Auckland 1072
New Zealand

Contact
Ph: +64 9 528 9471
E: info@hunza.co.nz
Web: hunzalighting.com

This document contains proprietary information of Hunza™. Its receipt or possession does not convey any rights to reproduce or disclose its content. Due to continued product improvements, specifications may change without notification.

Installation, IES & Guides are available online

MADE IN NEW ZEALAND