

## CATENARY MOUNT HIGH POWER RGBW INSTALLATION INSTRUCTIONS

NOTE: THESE INSTRUCTIONS MUST NOT CONTRAVENE YOUR LOCAL ELECTRICAL AUTHORITY REGULATIONS, WITH WHICH ALL INSTRUCTIONS HERE IN MUST COMPLY.  
PLEASE KEEP INSTRUCTIONS FOR FUTURE REFERENCE.

### LED CHANGING

**CAUTION:** Make sure that the power to the luminaire is switched off before attempting to change the LED.

#### LED Changing Sequence


When replacing gasket and lens, make sure there is no dirt or grit on the gasket. Dirt or grit on the gasket may cause luminaire to leak.

#### Gasket and lens sequence


Place lens on top of lamp and put orange gasket on top of lens. Screw on lens ring.

#### Recommendation:

Run all low voltage cables in flexible conduit for extra protection. Use Hunza Cable Joint Kit CJK#150. Do not over tighten lens ring.

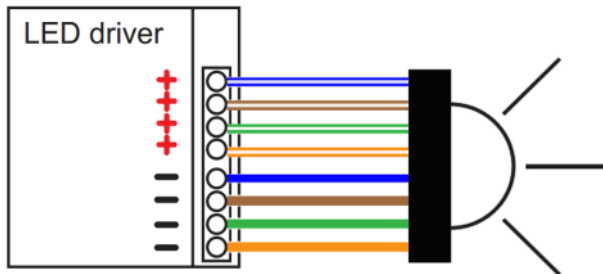

1 Fixture per driver - 8 Wire format

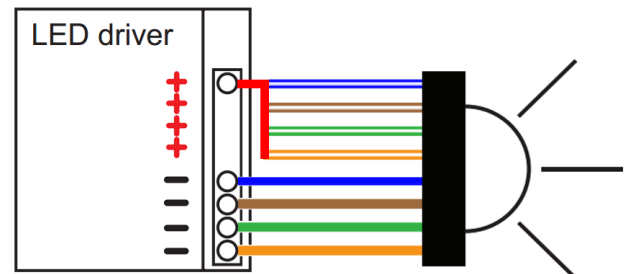

1 Fixture per driver - Common positive format

**Warning:** Do not disconnect the LED luminaire from secondary side of the the driver connected to the mains. Switch off mains FIRST. Allow the LED to discharge, then disconnect luminaire from the output side of the driver.

Do not water blast/jet wash this fixture under any circumstance

DO NOT connect in close proximity to inductive loads, eg. air conditioning systems, water pumps etc. without appropriate mains filtering. Use a suppression interface module for every six luminaires connected to the circuit.

DO NOT carry out a Megger or insulation test on a circuit with a RETRO™ luminaires connected to it.

DO NOT mount on a horizontal surface where water may collect or pool.

DO NOT connect to any Electronic Home System without checking with the manufacturer that it is suitable to control the HUNZA™ luminaire.