


Sign Lite

Cat. No. SGNL Cat. No. SGNL/R Cat. No. SGNLGU












The Sign Lite can be used for lighting signs, wall displays, building highlights, and external barbeques. The fully adjustable head is mounted on the end of a 500mm (19¾") arm, allowing 360 degree rotation and 90 degree elevation.

Available in 12 volt or with a built in 110 or 240 volt transformer (Retro™) option. This luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

Ordering Information

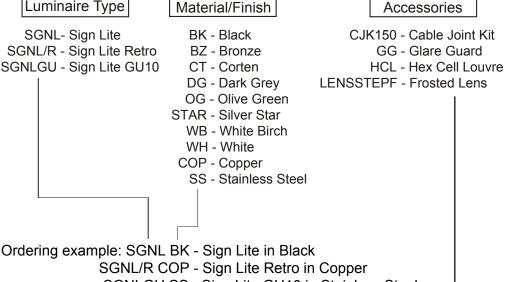

SGNLGU SS - Sign Lite GU10 in Stainless Steel

LENSSTEPF - Frosted Lens

(accessories ordered separately)



Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant polyester powder coat. Body: 63.5mm (2½") x 10mm (3/8") tube. End cap: solid aluminium 63.5mm (2½")

Arm: 38.1mm (1½") x 500mm (19¾") aluminium tube.

Base: 2mm (1/16") hand spun aluminium. Back Plate: cast from virgin high corrosion resistant CC401 low copper aluminium alloy.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White, Birch, White.

Copper

Body: 63.5mm (2½") x 10mm (3/8") tube. End cap: solid copper 63.5mm (2½") rod. Arm: 38.1mm (1½") x 500mm (19¾") copper tube.

Base: 2mm (1/16") hand spun copper Back Plate: forged brass.

316 Stainless Steel

Body: 63.5mm $(2\frac{1}{2})$ x 10mm (3/8) tube. End cap: solid stainless steel 63.5mm $(2\frac{1}{2})$ rod.

Arm: 38.1mm (1½") x 500mm (19¾")

stainless steel tube.

Base: 2mm (1/16") hand spun stainless

Back Plate: investment cast and CNC

machined stainless steel.

Mounting

12 volt - the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada. **Retro** - a mounting plate is fixed to the wall using two screws, the luminaire is fitted to the mounting plate.

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F). Lamp Holder

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada. Glare Guard (Cat. GG). Hex Cell Louvre (Cat. HCL). Frosted Lens (Cat. LENSSTEPF).

Swivel

Aluminium and Copper luminaires -360° rotation and 0-90° elevation, solid brass with anti rust spring. Stainless Steel luminaires - 360° rotation and 0-90° elevation, full stainless

Standards

IP66, UL1838, (\$)*

steel construction.



Luminaire Weight

Aluminium - 1.000kg (2lb 3oz) **Copper** - 2.140kg (4lb 11oz) Stainless Steel - 1.620kg (3lb 9oz)

Power Supply

12 volt - Hunza Inground or Wall Mount Transformer: not included.

USA and Canada

Hunza Wall Mount Transformer: not included.

Retro - Hunza 110/240 volt ac potted electronic transformer is built into the base. Dimmable with a suitable dimmer.

Lamp Options


MR16 - 20 or 35 watt lamp max.


GU10 - 25 or 35 watt lamp max. **USA** and Canada

(6')

MR16 - 20 or 35 watt lamp max.

GU10 - lamp not supplied.

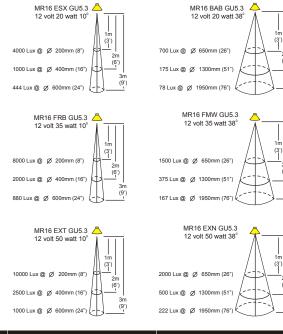

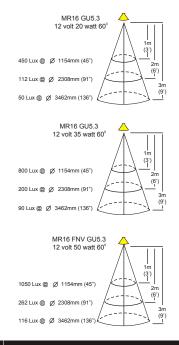



HUNZA FACTORY 130 Felton Mathew Ave Glen Innes Auckland 1072 New Zealand

Ph: 64-9-528 9471 Fax: 64-9-528 9361 hunza@hunza.co.nz www.hunzalighting.com INTERNATIONAL CONTACTS: http://www.hunzalighting.com/ contact.php Specification may change without notice.

Manufactured in New Zealand. © 2016 Hunza Holdings Ltd.