HUNZA DUTDOOR LIGHTING Cast Solid Bronze Flood Lite **SPEC SHEET**

SPECIFICATIONS




LED Chip	Cree CXA 2540 Plug and Play field replaceable LED board
Luminaire Output	2300 Lumens at 500mA , delivered from luminaire with unobstructed beam.
Lumens Per Watt	126 Lumens @ 18 watt minimum, delivered from luminaire with an unobstructed beam
CRI Warm White (3000K)	80 Standard, 90+ Optional
Colour Temperatures	2700K, 3000K, 4000K
Beam Angles	22, 33, 51 Degrees
Ingress Protection	IP68 *not for use in pool or ponds
Warranty	Electronics = 5 years Body/Flange SBZ= 25 years
Standards	AS/NZS 61046cUL 1838, 2108, CE

PROJECT:

TYPE:


SOURCE:

NOTES:

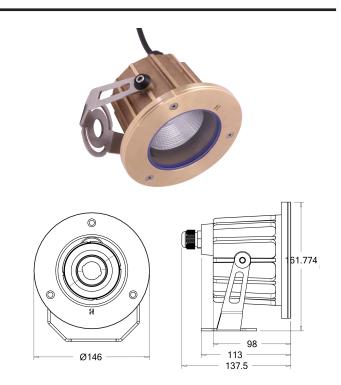

PRODUCT CONFIGURATION

Please fill in appropriate codes into boxes provided

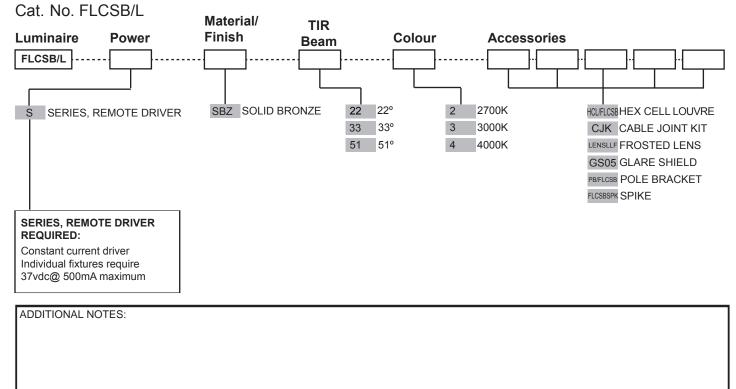

Click here for 240v Remote Power Supply Guidance Charts

Click here for USA Remote Power Supply Guidance Charts



HUNZA FACTORY 130 Felton Mathew Ave Saint Johns Auckland 1072 New Zealand

Ph: +64-9-528 9471 Fax: +64-9-528 9361 hunza@hunza.co.nz www.hunzalighting.com

INTERNATIONAL CONTACTS: http://www.hunzalighting.com/contact.php Specifications may change without notice. This document contains proprietary inform of Hunza. Its receipt or possession does not convey an rights to reproduce or disclose

LUMINAIRE CONSTRUCTION

Body:

CNC machined sand cast silicon bronze.

Flange:

CNC machined from Solid Bronze bar 150mm (6").

Lens: 12mm (1/2") extra clear, low iron, flush fit, shatter resistant glass. Lifetime warranty.

Gaskets:

Silicone 220°C (428°F).

Adjustability:


The gimbal is adjustable, allowing 120° rotation and 0-120° elevation.

Mounting:


The mounting bracket is fixed to the surface using two stainless steel screws.

Luminaire Weight:

2.3kg (5lb)

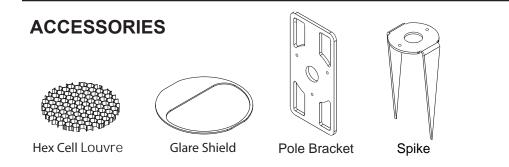

BEAM ANGLES

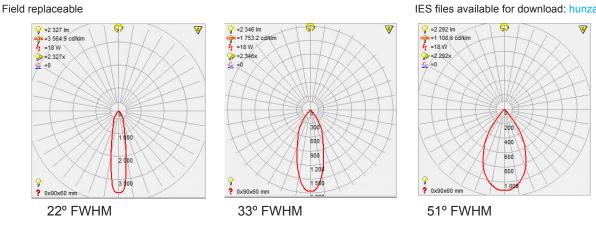


WIRING GUIDE

Available for download: hunzalighting.com/downloads

Specifications may change without notification

Aug 2017

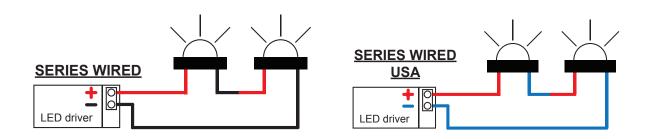

Diagrams are a guide only, wire colours and polarity may change depending on fixture and country



IES files available for download: hunzalighting.com/downloads