

CJK150 - Cable Joint Kit
GG - Glare Guard
HCL - Hex Cell Louvre
LENSSTEPF - Frosted Lens

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant polyester powder coat.
Body: 63.5mm (2½") x 10mm (3/8").
End cap: solid aluminium 63.5mm (2½") rod.
Pole: 38.1mm (1½") x 400mm (15¾") aluminium tube.

Copper

Body: 63.5mm (2½") x 10mm (3/8").
End cap: solid copper 63.5mm (2½") rod.
Pole: 38.1mm (1½") x 400mm (15¾") copper tube.

316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8").
End cap: solid stainless steel 63.5mm (2½") rod.
Pole: 38.1mm (1½") x 400mm (15¾") stainless steel tube.

Mounting

The pole 400mm (15¾") is directly mounted into the earth or concrete.

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.
Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lamp Holder

MR16 & GU10 - 350°C (662°F)
ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Glare Guard (Cat. GG).

Hex Cell Louvre (Cat. HCL).

Frosted Lens (Cat. LENSSTEPF).


Swivel

Aluminium and Copper

luminaires - 360° rotation and 0-90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0-90° elevation, full stainless steel construction.

Standards

IP66, 

Luminaire Weight

Aluminium - 1.000kg (2lb 3oz)

Copper - 1.700kg (3lb 12oz)

Stainless Steel - 1.500kg (3lb 5oz)

Power Supply

Hunza Inground or Wall Mount
Transformer: not included.

Lamp Options










MR16 - 20 or 35 watt lamp max.

GU10 - 25 or 35 watt lamp max.

USA and Canada

MR16 - 20 or 35 watt lamp max.

GU10 - Lamp not supplied.

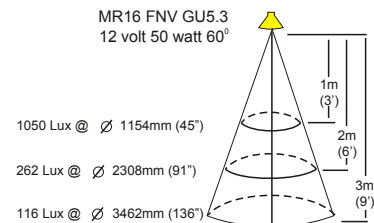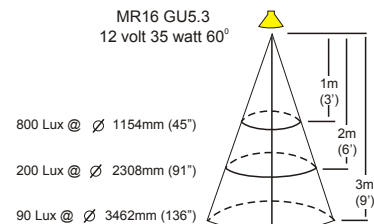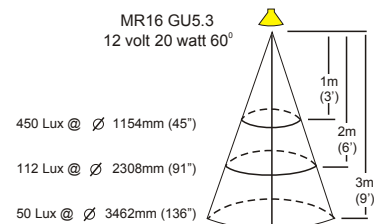

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY 130
Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2011 Hunza Holdings Ltd.

Ver 1.4